


U-Type Spring Nut

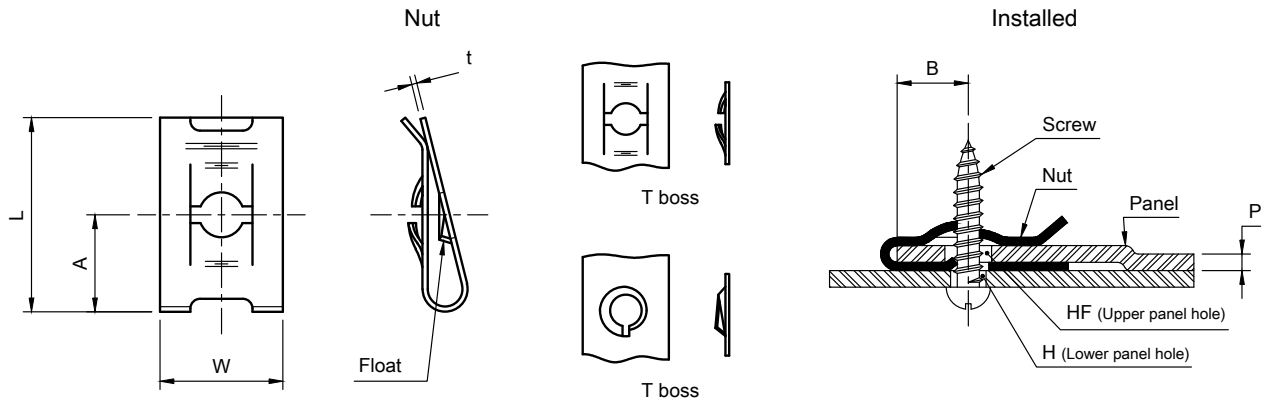

Unit : mm

Size-No.	Applicable screw	Nut				Panel				Remarks			
		W	L	A	t	P		B	H	HF	Material	Boss	Float
						Min.	Max.						
USN- 3001	M3 x 0.5	11.2	18	9	0.3	0.6	1	7.5	4	5.5		T	
3006	M3 x 0.5	8	11.5	6	0.3	0.6	1.2	4.5	4	4	SUS	P	Without
3012	M3 - 24	8	11.5	6	0.45	0.6	1.2	4.5	4	4	SUS	P	Without
4001	M4 x 0.7	12.7	20	10	0.4	0.7	1.2	8	5	7		T	
4003	M4 x 0.7	9	16.5	10	0.4	0.7	1.2	8.5	5	6		P	Without
4004	M4 - 16	12.7	20	10	0.8	0.8	1.5	8	5	7		T	
4005	M4 - 16	12.7	20	10	0.8	1	1.6	8	5	6	SUS	P	Without
4006	M4 - 16	11	16.3	8.3	0.6	1	1.6	6.5	5	7		T	
4007	M4 - 16	12.7	20	13	0.45	2	2.7	10	5	6		T	Without
4024	M4 - 16	11	17	9.1	0.6	0.7	1.6	7	5	7		T	
4026	M4 - 16	11	16	8	0.5	2	2.5	6	5	7	SUS	P	
4031	M4 - 18	9	19	13	0.45	2	3	10.5	5	6		P	Without
4037	M4 x 0.7	9	18	12	0.4	1	1.2	10	5	6	SUS	P	Without
4048	M4 - 16	11	24	17	0.6	0.7	1.6	14.5	5	7		T	
5001	M5 x 0.8	12.7	20	10	0.45	0.7	1.2	8	6.5	8		T	
5003	M5 - 12	13	20	11.5	0.7	1	2.3	9.5	6.5	7		T	Without
5004	M5 - 16	13	19.6	11.6	0.6	0.7	1.5	9.5	6.5	8		P	
5008	M5 - 16	12.7	32.2	22.2	0.7	1	2.6	19	6.5	8	SUS	P	
5011	M5 - 16	8	16	9	0.6	0.7	1.6	7	6.5	7		P	
5016	M5 - 16	12.7	16.2	8.7	0.7	0.8	1.6	7	6.5	6.5		T	Without
5017	M5 x 0.8	12.7	21	11.5	0.4	1.3	2	9	6.5	6.5		T	Without
5018	M5 - 16	13	20	10	0.7	1.2	1.6	8	6.5	6.5		P	Without
6001	M6 x 1	12.7	20	10	0.5	0.7	1.2	8	7.5	9.5		T	
6002	M6 - 10	12.7	21.8	11.8	0.8	0.7	1.2	10	7.5	7.5		P	Without

- Material = carbon steel
- Material = stainless steel

Hardness = HRC40~50

Finish = black oxide or Zinc plating