


Push-on Spring Nut (Rectangle)

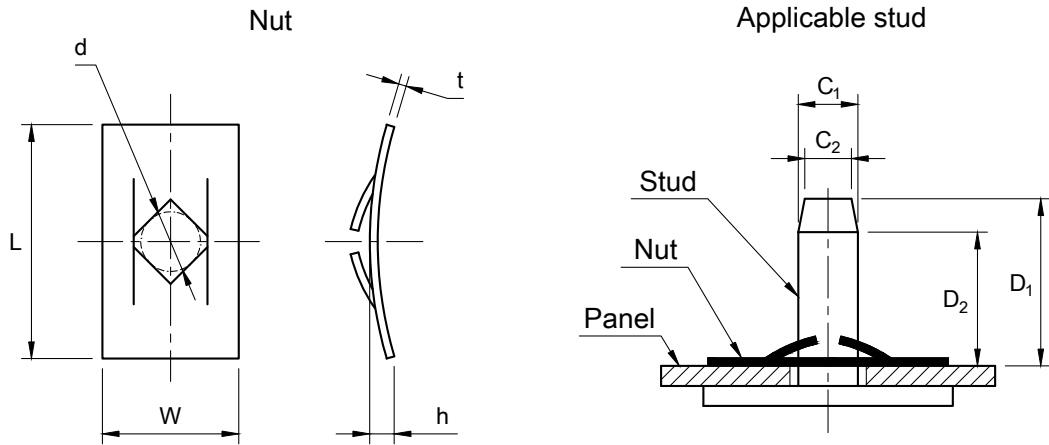


Unit : mm

Size-No.	Nut								Applicable stud					
	d		W	L	Gen. Tol.	h		t	C ₁		C ₂	D ₁	D ₂	
Basic	Tol.	Basic				Tol.	Basic		Tol.	Basic				Tol.
PSN-	※ 1.2	1.1	±0.1	6	12	±0.15	0.95	±0.25	0.3	±0.05	1.3	1	6	4.5
	※ 1.5	1.38		6	12		0.95		0.3		1.57	1.2	6	4.5
	※ 1.8	1.68		6	12		1.05		0.4		1.87	1.5	6	4.5
	2	1.85		6	12		1		0.4		2.07	1.6	6	4.5
	3	2.8	+0.2 -0.1	8	14	±0.25	1.2	0.4	3.1	2.6	8	6		
	4	3.8		9	16		1.5	0.4	4.1	3.6	8	6		
	5	4.8		11	18		1.6	0.4	5.1	4.6	8	6		
	6	5.8		12	20		1.7	0.4	6.1	5.6	10	8		
8	7.8	15	23	2.2	0.5	8.1	7.6	10	8					

• Material = carbon steel Hardness = HRC40~50 Finish = black oxide

Note : It should be noted that if the retained stud is rigid or it is applied with a finish that produces a hard coating (e.g., nickel plating, chrome plating), the nut may be unserviceable.

J-Type Spring Nut

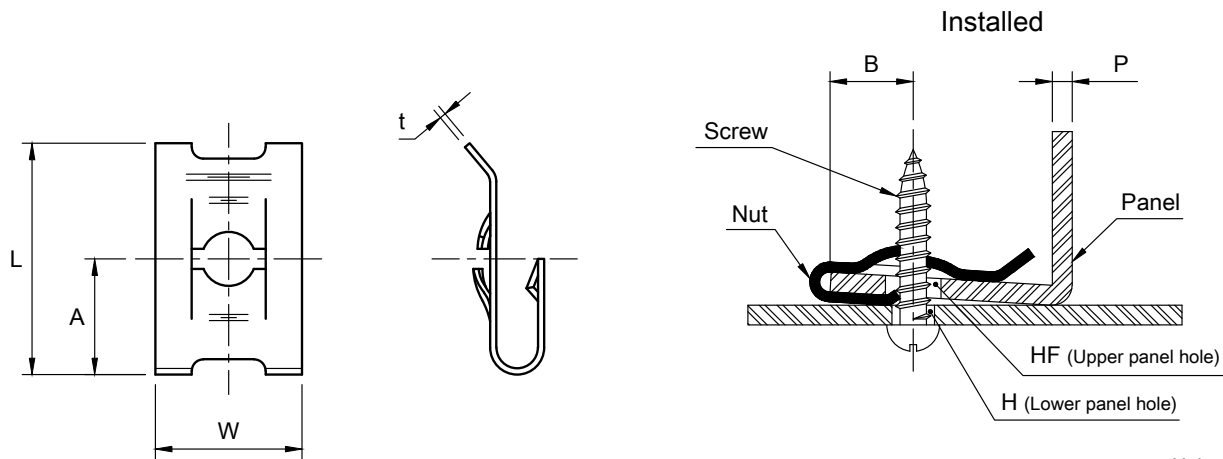

Unit : mm

Size-No.	Applicable screw	Nut				Panel					
		W	L	A	t	P		B	H	HF	
Min.	Max.										
JSN-	3001	M3 x 0.5	11.2	18	9	0.3	0.6	1	7.5	4	5.5
	4001	M4 x 0.7	12.7	20	10	0.4	0.7	1.2	8	5	7
	4003	M4 x 18	12.7	20	10	0.6	0.8	1.2	8	5	7
	5001	M5 x 0.8	12.7	20	10	0.45	0.7	1.2	8	6	8
	5004	M5 x 16	12.7	21.2	11.2	0.7	0.7	1.2	9	6	8
	5003	M5 x 12	12.7	22	12	0.7	2.5	3	9	6	8
	6001	M6 x 1	12.7	20	10	0.5	0.7	1.2	8	7.5	9.5
	6002	M6 x 14	12.7	20	10	0.7	0.7	0.8	8	7.5	9.5

• Material = carbon steel Hardness = HRC40~50 Finish = black oxide